

PET Acrylic Double Coated Tape

NKS-5965



Product Description:

* The tape consisting of a polyester film backing, double side coated with acrylic pressure sensitive adhesive

Product Features::


- * Ultra transparency
- * Anti scrub
- * No adhesive residue
- * Good initial tack
- * Great adhesion to a variety of material

Application:

- * Nameplate lamination
- * LCD reflective film, plastic film splicing
- * PP, PE material bonding
- * ABS plastic parts in automotive industry
- * EPDM rubber bonding

Construction:

Red Release Liner
Acrylic Adhesive
Polyester Film
Acrylic Adhesive

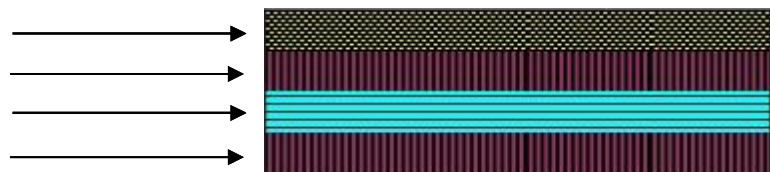

Properties:

Description			Property	
Adhesive		Acrylic	Adhesion to Steel	≥20N/25mm
Carrier		PET	Static Shear Strength	1000g,6.4cm ² ,2,880min+
Thickness	Tape	205mic		
	Liner	50mic		
	Total	255mic		
Liner	Red Film		Solvent Resistant	
Temperature Resistance(°C)			-20°C-120°C	
Tape color	Clear		Heat Resistant	
Storage	21°C (70F) ,50%RH.			

These values are measured values and not guaranteed value

Storage Conditions:

Store in a clean dry shady place. Temperature of 20 degrees Celcius and 65 percent relative humidity are recommended.

Notice:

All physical properties, statements, and recommendations are based either on tests we believe to be reliable or our experience, but they are not guaranteed. Naikos recommends each user determine the suitability of the product for the intended purpose.

Warranty and Limited Remedy:

THE FOLLOWING WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.

Naikos warrants its tape will be free from defects in material and manufacturer. If a tape is proved to be defective, then the exclusive remedy, and Naikos' and seller's sole obligation shall be, at Naikos' option, to replace the quantity of the tape which is proved to be defective or to refund the purchase price.

Limitations of Liability:

Except where prohibited by law, Naikos will not be liable for any loss or damage arising from the Naikos' product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

The forgoing Warranty and Limited Remedy and Limitation of Liability may be changed only by a written agreement signed by authorized officers of Naikos and seller.

NAIKOS(Xiamen)Adhesive Tape Co.,Ltd.

Tel: +86-592-7368007

Fax: +86-592-7368007

Email: ocs8@xmnks.com

Web: www.xmnks.com / www.nkstape.com

Add: No.48, Huli Industrial Park, Meixi Street, Tong'an District, Xiamen City, Fujian, China